TESY
It's impressive

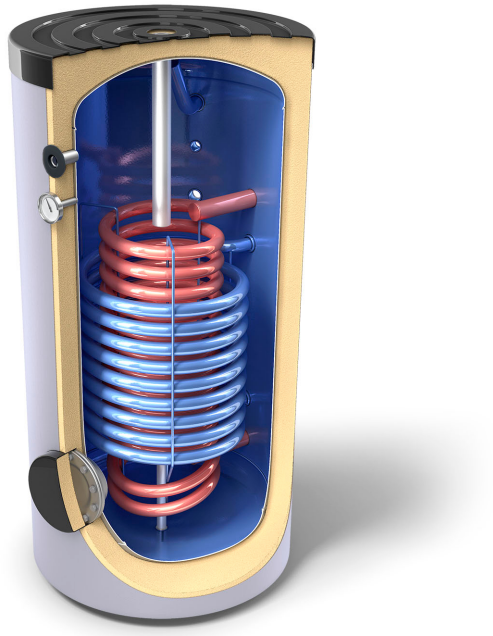

IHWTS FOR SOLAR/BOILER SYSTEMS IN PARALLEL MODE

EV 9S+13S 200 60

TIN	304998
Range	187
Net weight	78 kg
Insulation	PU 50 mm
Heat exchanger surface S1	0.95 m²
Heat exchanger surface S2	0.92 m²
Heat exchanger capacity S1	5.8 L
Heat exchanger capacity S2	5.6 L
Heat losses ΔT 45K	59 W
Energy class	B
Maximum operational temperature	95 °C
Maximum operational temperature of the heat exchanger	110 °C

V40 - hot water delivered with a temperature of at least 40□ (S1)	265 L
V40 - hot water delivered with a temperature of at least 40□ (S2)	288 L
Diameter	600 mm